





RoHS

本产品符合我司QA-3-04-005  
环境管理物质标准规范


包装图

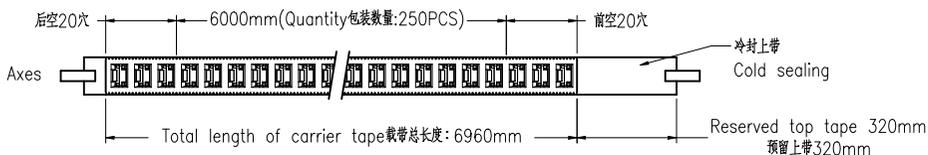

Pull out direction 拉出方向

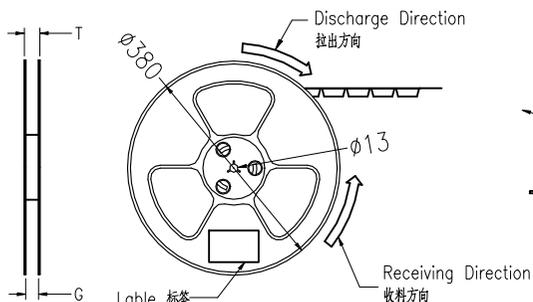

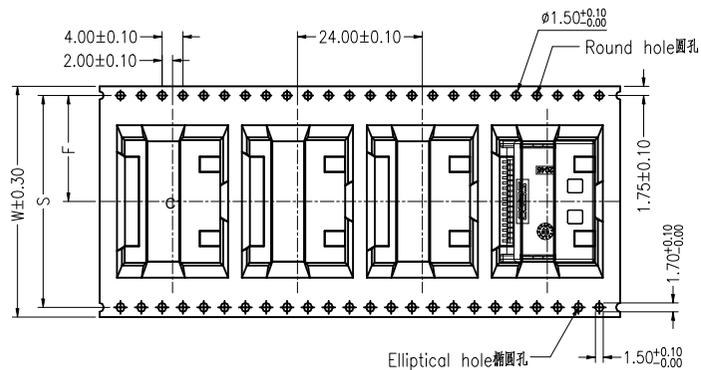


COVER TAPE PEEL STRENGTH:20~120g  
剥离力量20~120g  
速度 PEEL SPEED:300mm/minute



Lable 标签  
Single hole: None Hole Side  
单孔: 贴无端孔侧  
Double hole: Elliptical Hole Side  
双孔: 贴椭圆孔侧

Vacuum packing  
真空包装  
Drier  
干燥剂款2包5g

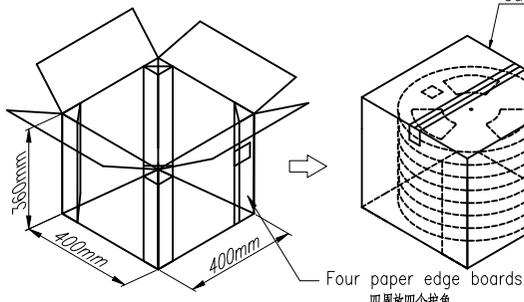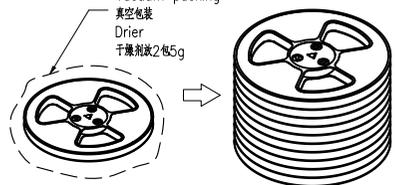

Note:

- Carrier Camber Is Within 1mm In 100mm ; 带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM ; 圆孔十个孔距离累计允许公差为±0.2mm
- Carrier tape material: PS,thickness=0.50±0.05mm,color:lucency.  
载带材质:PS,厚度=0.50±0.05mm,颜色:透明色.
- Bracer material: PS,thickness=0.40±0.05mm,color:lucency.  
保护带材质:PS,厚度=0.40±0.05mm,颜色:透明色.
- Cover tape material: PET,Cold sealing.  
上带材质:PET,冷封.
- Reel material: PS,color:blue.卷盘材质:PS,颜色:蓝色.
- Carton material 纸箱材质:K=K; Carton Thickness 纸箱厚度: 6~7mm

Applicable Product No. 适用产品料号	2045WRS-2*XXA/B-10TSW1XR-X
----------------------------------	----------------------------

Carrier Tape No. 载带料号	B0	W	S	F	T	G	REEL 卷/PCS	CARTON 箱/R	CARTON 箱/PCS
ZD2045WRS-2*08HF	23.40	44	40.40	20.20	48.5	44.5	250	7	1750
ZD2045WRS-2*10HF	27.40	44	40.40	20.20	48.5	44.5		7	1750
ZD2045WRS-2*12HF	31.40	56	52.40	26.20	60.5	56.5		5	1250

料号: CTN: ZD2045WRS-2\*XXHF  
PPN:2045WRS-2\*XXX-10TSW1XR-X

名称:  
2.00 mm 90° Wafer Connectors Packing

单位	比例	页次	版本	编号
mm	1:1	1/1	A0	A-000

**SMS** 东莞市思索技术股份有限公司  
Dongguan SESO Technology Co.,Ltd.

核准	审查	制作	日期
杨蒙	王智	滕敏	2023/05/18

20230518	A0	/	首次发行	/	杨蒙
日期	版次	变更编号	变更内容说明	变更人	核准

一般公差	.X ±0.35
	.XX ±0.25
	.XXX ±0.15
	X: ±0.2

